


## Handle Lagnut



**AR Handle Lagnuts** are made of hex nuts welded to substantial wire loops. Available in 13 mm, 20 mm, 25 mm and 32 mm ( $\frac{1}{2}$ ",  $\frac{3}{4}$ ", 1" and  $1\frac{1}{4}$ ") diameters with lag thread. The handle eliminates the need for using a wrench and makes installation and/or stripping fast and simple.

### 2:1 Safety Factor

**To order, please specify the following information**


EXAMPLE

Name .....Handle Lagnut

Diameter .....13 mm ( $\frac{1}{2}$ " )

Quantity ..... 200

SWL is based on an approximate 2:1 Factor of Safety

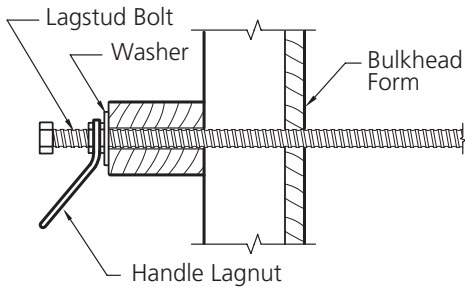

Bolt Diameter	Threads per inch (TPI)	Handle length from nut centre	Safe Working Load kN (lbs)
13 mm ( $\frac{1}{2}$ " )	6	125 mm (5")	40 kN (9,000 lbs)
20 mm ( $\frac{3}{4}$ " )	4 $\frac{1}{2}$	120 mm (4 $\frac{7}{8}$ " )	80 kN (18,000 lbs)
25 mm (1" )	3 $\frac{1}{2}$	140 mm (5 $\frac{1}{2}$ " )	167 kN (37,500 lbs)
32 mm (1 $\frac{1}{4}$ " )	3 $\frac{1}{2}$	210 mm (8 $\frac{3}{8}$ " )	256 kN (57,500 lbs)
38 mm (1 $\frac{1}{2}$ " )	<i>Contact the AR Technical Department for details.</i>		